

# basalt tala

Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway, Basalt unites sandcast solid brass and mouth-blown glass to evoke nature's magnitude.

### Materials

Sandcast solid brass and mouth-blown glass

Dimensions







Available in Pendant or Table Lamp




223 west erie street, chicago, il., 60654 t: 312 335 1033 f: 312 335 1025 info@orangeskin.com www.orangeskin.com

# BASALT BULB I

### 5.3 WATT | 340 LUMENS | 3000K

Translucent, matte LED filament bulb made of mouth-blown, borosilicate glass. This lamp uses 5.3 Watts of power and achieves 340 lumens at a CRI of 95. It has an IP54 rating.

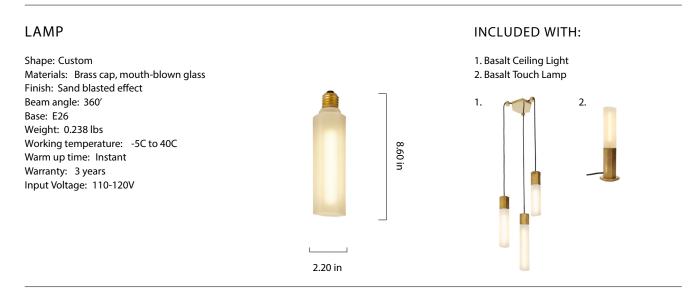


#### PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	340
Luminaire circuits per watt (LM/W)	65
Lifetime (TM-21) (hours)	15,000
Colour Temperature	3000K
Power factor	0.9

#### DIMMING

Dimmable: Yes Dimming type: Trailing edge Recommended US Dimmer: Lutron - Diva DVELV-300P-XX (X denotes faceplate color)

A full list of compatible dimmers is available on request.



IES/LDT FILE Available upon request.

EAN US: 5060400150151



#### POLAR DIAGRAM

### **BASALT BULB II**

### 6.5W | 420 LUMENS | 3000K

Translucent, matte LED filament bulb made of mouth-blown, borosilicate glass. This lamp uses 6.5Watts of power and achieves 420 lumens at a CRI of 95. It has an IP54 rating.




#### PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	420
Luminaire circuits per watt (LM/W)	65
Lifetime (TM-21) (hours)	15,000
Colour Temperature	3000K
Power factor	0.9

#### DIMMING

Dimmable: Yes Dimming type: Trailing edge Recommended US Dimmer: Lutron - Diva DVELV-300P-XX (X denotes faceplate color)

A full list of compatible dimmers is available on request.



### IES/LDT FILE

Available upon request.


EAN US: 5060400150168



# BASALT BULB III

### 8.5 WATT | 550 LUMENS | 3000K

Translucent, matte LED filament bulb made of mouth-blown, borosilicate glass. This lamp uses 8.5 Watts of power and achieves 550 lumens at a CRI of 95. It has an IP54 rating.

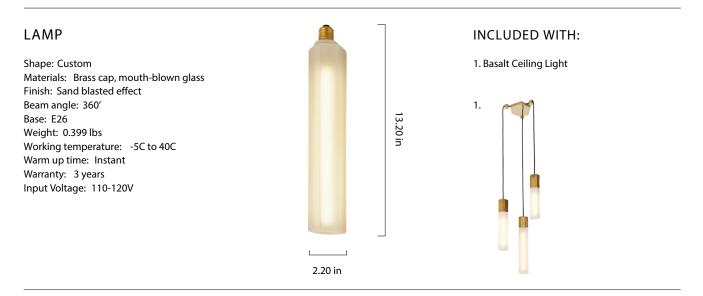


#### PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	550
Luminaire circuits per watt (LM/W)	65
Lifetime (TM-21) (hours)	15,000
Colour Temperature	3000K
Power factor	0.9

#### DIMMING

Dimmable: Yes Dimming type: Trailing edge Recommended US Dimmer: Lutron - Diva DVELV-300P-XX (X denotes faceplate color)

A full list of compatible dimmers is available on request.



IES/LDT FILE Available upon request.

wallable apointequest.

EAN US: 5060400150847



# **BASALT PENDANT I**

Sandcast and polished solid brass pendant, fitted with a braided 4.5 metre black kink-free cord that's easily adjusted by hand. Comes as one of three pendants and one universal ceiling rose as standard.



# **BASALT PENDANT II**

Sandcast and polished solid brass pendant, fitted with a braided 4.5 metre black kink-free cord that's easily adjusted by hand. Comes as one of three pendants and one universal ceiling rose as standard.



# **BASALT PENDANT III**

Sandcast and polished solid brass pendant, fitted with a braided 4.5 metre black kink-free cord that's easily adjusted by hand. Comes as one of three pendants and one universal ceiling rose as standard.



# **BASALT CEILING ROSE**

Sandcast and polished solid brass ceiling rose and nodes that enable infinite arrangements. Comes with braided 1 metre black kink-free connector cord for joining multiple units of the Basalt Ceiling Light together.

